TYRI

INTELLi light®

Quick Start Manual

ENJOY A NEW WORLD OF BRIGHT LIGHT

Contents

Preface 3

1. Create Account 4

2. Add Mesh 5

3. Add Devices 6

4. Share Mesh 7

5. Add Remote Controller 8

6. Remote Controller 9

7. Delete Devices from Mesh 10

8. Factory Reset 11

9. Unsafe Delete 12

10. Support & Troubleshooting 13

11. Declaration of Conformity 14

Preface

In order to make additions, changes and updates in the system, an internet connection is needed. Once everything is installed, you can use the system without an internet connection.

You start by creating an account in the app. This account will be linked to the email address you register.

There are three different levels of rights in the system: Owner / Editor / Operator. The owner determines rights for the editor and operator.


An account can contain any number of meshes/systems. So if you own several machines, you can add them to one account. As an owner, you can share mesh access. You can also transfer ownership to another user and thereby transfer all rights.



1. Create Account

01. Download the app from App Store or Google Play.
02. Press Log in.
03. Press Create account.
04. Complete all boxes, accept the privacy policy and then press Create account.

01.

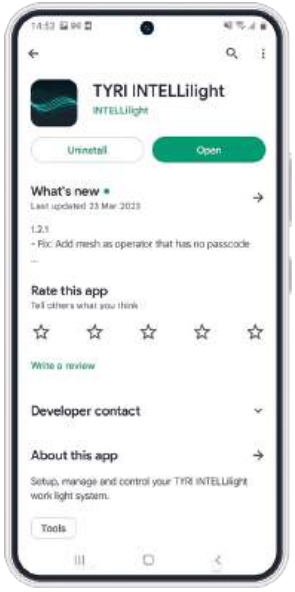




TYRI INTELLI*light* App

02.



03.

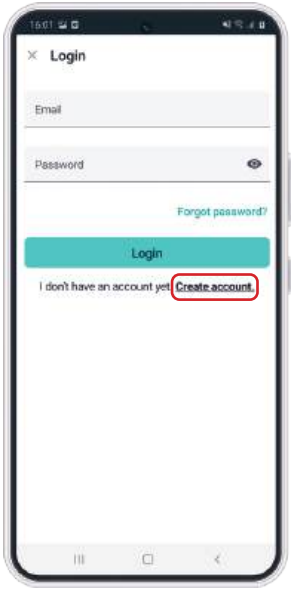

04.




2. Add Mesh

01. Press **Find mesh** to add an existing mesh. You can search for a mesh if you are near the lights and the owner has chosen to make the mesh discoverable. Depending on the level of access the owner has decided to share, your list may be shorter than the example shown.


02. Press **Create new mesh** if you wish to set up a new mesh.

03. Press ☰ to find a list of all your meshes.


01.

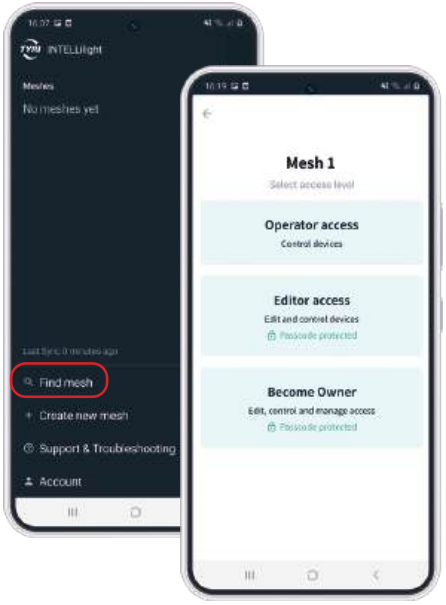

02.

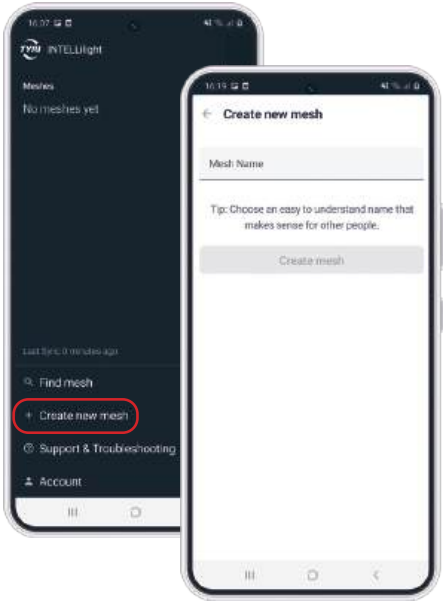

03.

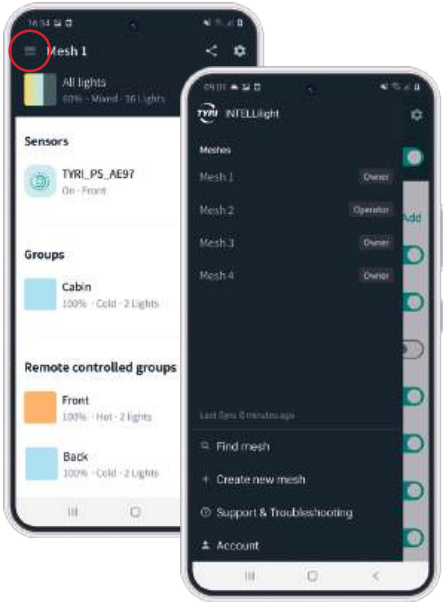

3. Add Devices

Make sure the device you are adding is powered up and switched on and you are in close proximity.


We recommend adding all the devices to your mesh BEFORE you create groups.

01. Press ⚙


02. Press ＋

03. Select which device you want to add.


01.

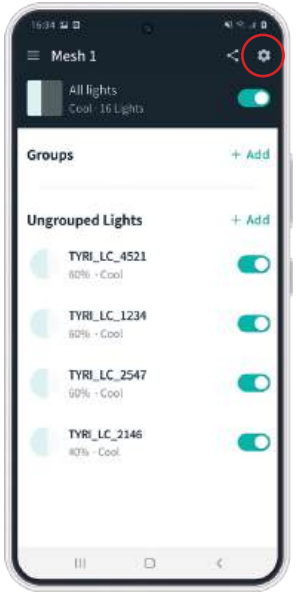

02.

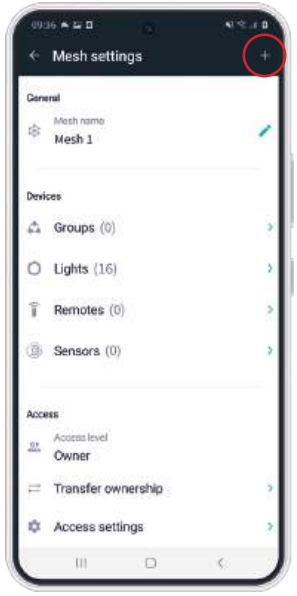

03.

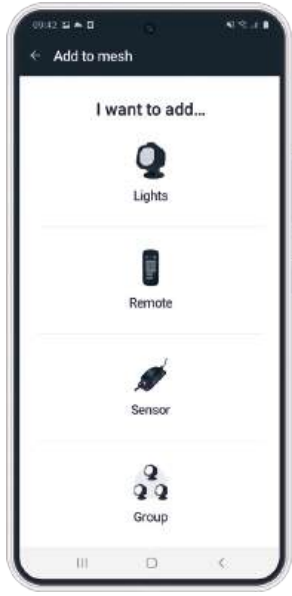


4. Share Mesh


01. As an owner, you can share access to a mesh. You can also transfer ownership to another user and thereby transfer all rights. Choose which rights the receiver should be granted, then choose create a password to share access.

02. As a receiver, confirm and follow the instructions in the app.

01.

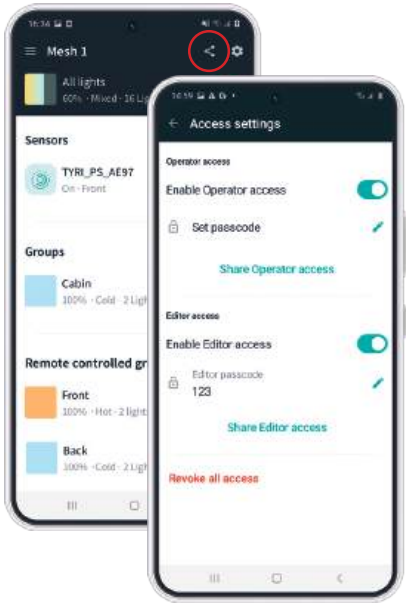

02.

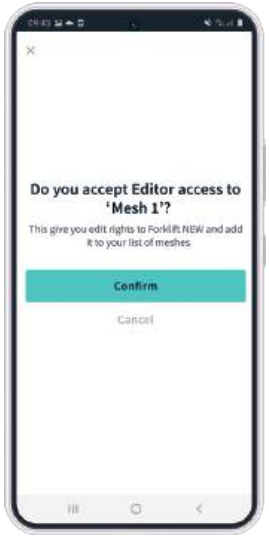

5. Add Remote Controller


01. When you install a remote controller, four groups are automatically created in the main menu. These groups correspond to the four buttons you have on the remote controller.

02. Press Edit group or the pencil in the top right corner.


03. Press to identify a light and press to add the light to the group.

Note! If you have created a group in the app where a light is included which you want to access with the remote controller – then you have to ungroup the light from the app- assigned group before you can add it to a remote controlled group.


01.

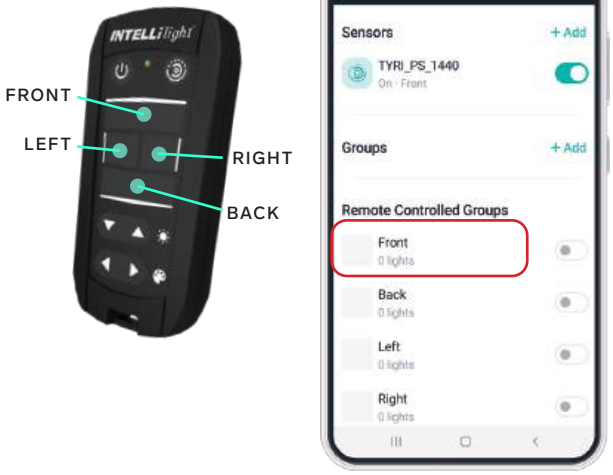

02.

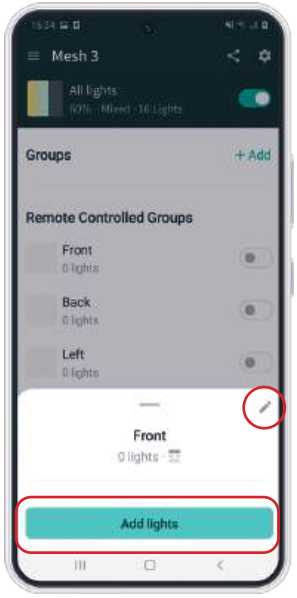

03.

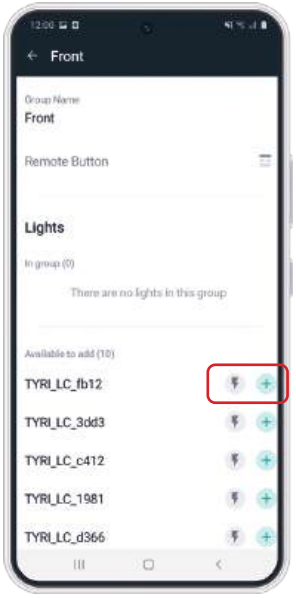

6. Remote Controller

01. You can change the brightness and colour temperature of individual groups or all groups on the remote controller.

    Press (short press) on the group you wish to control, and then change values for brightness and colour temperature using the arrow keys.

    If you press the on/off button (short press), all groups are selected.

    Long press turns off the group/groups.

02. CR2032 battery included.

01.



02.



7. Delete Devices from Mesh


The devices are deleted one by one from the mesh. There are three different ways to remove a light from the system.

NOTE! This method is the preferred one.


01. Press ⚙
02. Select which device you wish to remove, in this case a light.
03. Choose which light you wish to delete.
04. Press Delete Light.

The light will reset to Factory mode. You can see that the light shines at full brightness.

01.

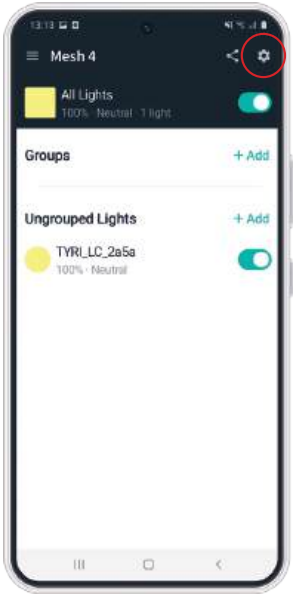


02.

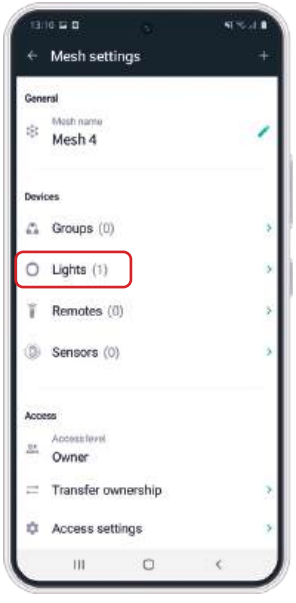

03.



04.

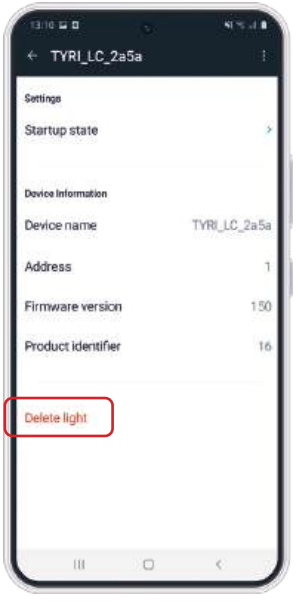

8. Factory Reset


If you want to delete a device from the Mesh we recommend you to follow instructions in section.*"7. Delete Devices from Mesh" on page 10.*

If you are missing access to an Account/ Mesh, you can reset each device (lamp/ remote controller/sensor) to Factory settings by using the information on the device (ID Number).

Note: If you do "Factory Reset" this way – the Mesh will still look for the device. To solve this, see information in section "9. Unsafe Delete" on page 12.

01. Press ☰ to open the side menu.
02. Press **Support & Troubleshooting.**
03. Press **Factory Reset.**
04. Select an option e.g. **Light** and key in the ID number from the back of the light.

01.

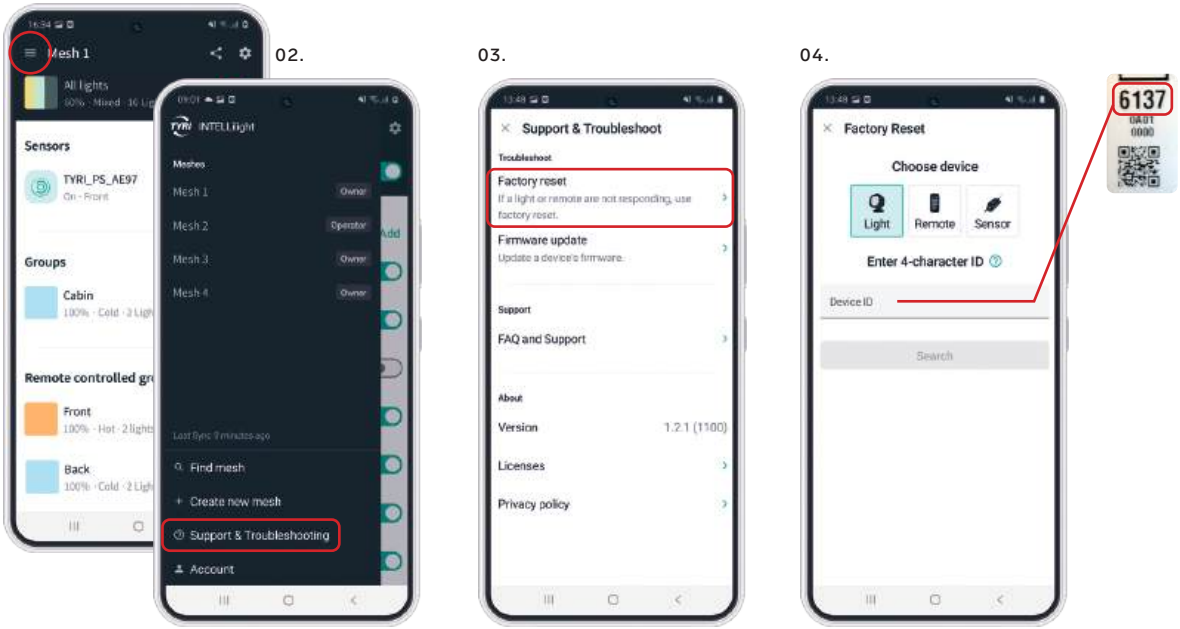


9. Unsafe Delete

To delete a device (lamp/remote controller/ sensor) that is no longer visible in the Mesh, follow instructions below.


Note: This option removes a device from the the Mesh but the device itself will not register it has been disconnected. To solve this issue and disconnect the device from the Mesh, follow instructions under “8. Factory Reset” on page 11.

01. Press ⚙
02. Press an option e.g. **Lights.**
03. Choose which light you wish to delete.
04. Press ⋯
05. Press **Unsafe Delete.**


01.

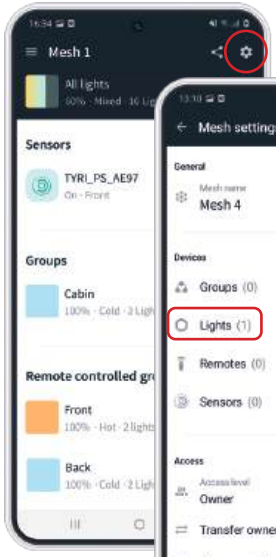

02.

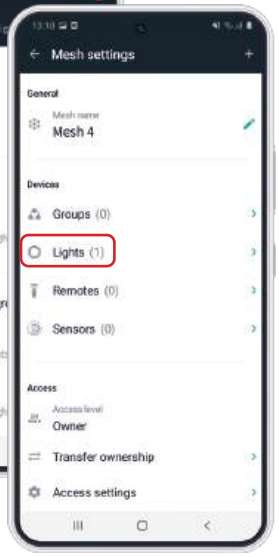

03.

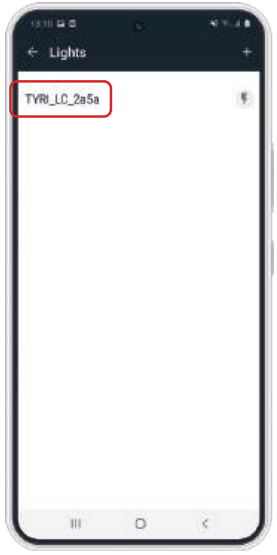

04.



05.




10. Support & Troubleshooting

You will find support and troubleshooting via the app.

01. Press ☰
02. Select Support & Troubleshooting.
03. Press FAQ and Support.
04. The support page will open in your web browser.

You can also reach the FAQ and Support page on a computer. Type *www.tyrilights.com/intellilight/support/* into your web browser.


01.

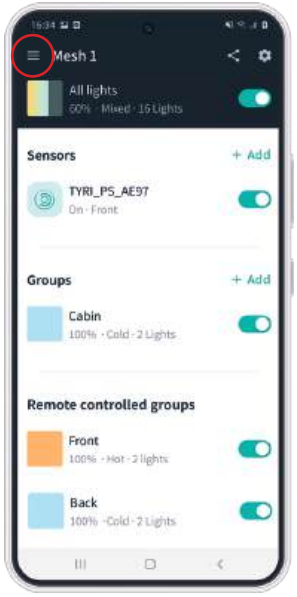

02.



03.

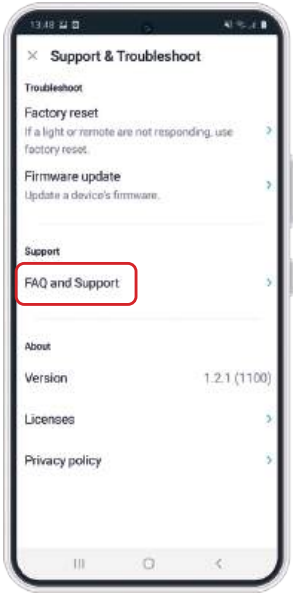

04.



11. Declaration of Conformity



Tyri Sweden AB hereby assures that this type of radio equipment complies with directive 2014/53/EU.
UKCA Radio Equipment Regulations 2017

NAME OF THE PRODUCT: TIL ACT
TYPE: CIL-XXX

The full text of the EU Declaration of Conformity can be found at the following web address:

https://www.tyrilights.com/doc/





Tyri Sweden AB hereby assures that this type of radio equipment complies with directive 2014/53/EU.
UKCA Radio Equipment Regulations 2017

NAME OF THE PRODUCT: TIL sensoconnect
TYPE: 54-027 & 54-045

The full text of the EU Declaration of Conformity can be found at the following web address:

https://www.tyrilights.com/doc/





Tyri Sweden AB hereby assures that this type of radio equipment complies with directive 2014/53/EU.
UKCA Radio Equipment Regulations 2017

NAME OF THE PRODUCT: TIL REMOTE
TYPE: 54-041

The full text of the EU Declaration of Conformity can be found at the following web address:

https://www.tyrilights.com/doc/



INTELLIGENT LIGHTING SOLUTIONS

www.tyrilights.com



IUM202505-1-EN