



1310

The 1310 is a vertical oval light that is suitable for forklift trucks and other. Used where you want a unique shape to make your vehicle stand out.

SUGGESTED APPLICATIONS

The 1310 is highly adaptable and can be used across numerous applications worldwide, including:



CONSTRUCTION



MATERIAL HANDLING



AGRICULTURE



TECHNICAL DATA

- Housing Material:** Cast Aluminium
- Mounting Options:** Hanging / Standing
- Lens Material:** Polycarbonate
- Temperature range:** -40 to +85 °C
- Connector:** Deutsch (DT04-2P) built in
- Weight:** 0.45 kg / 1 lb
- Light Patterns:** Symmetric
Asymmetric
Spot



Overheating Protection



Over-voltage Protection



Polarity Protection

TEST STANDARDS



Salt Spray ASTM B117



Vibration 5-2000 Hz 3 Axis, 10 Grms



Shock Tested 50 G 11 ms



IP69K





EN55025 / CISPR 25 Class 5
ISO 11452-2 / ISO 11452-4
ISO 16750-2 / ISO 10605
ISO 7637-2



UL Rated Optional


Consult website for additional lens & mounting options

TYRI's testing standards can be found at: www.tyrilights.com

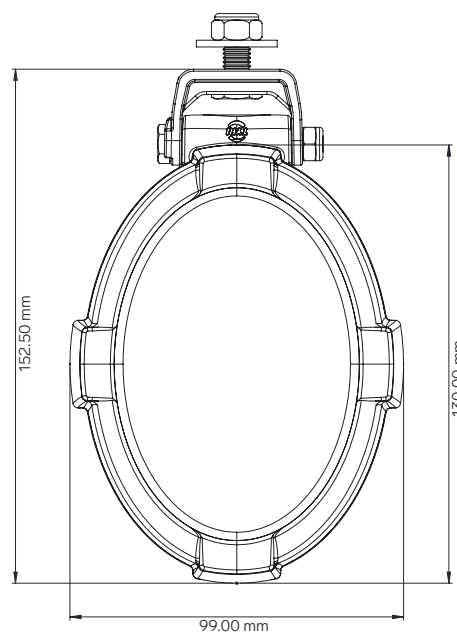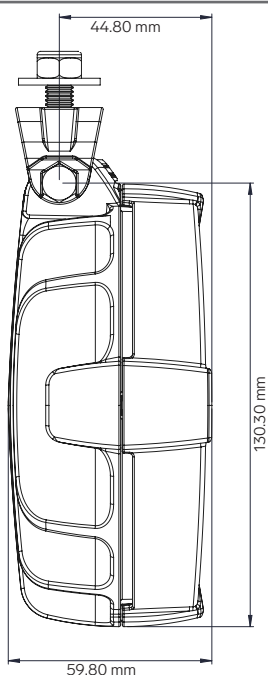



1310

LIGHT OUTPUT	VOLTAGE		AMP DRAW		POWER	COLOUR TEMPERATURE	EMC
	Machine	Operating Range	12 V	24 V			
Effective Lumen			12 V	24 V	Watts	K	EN55025 / CISPR25
750 lm	12-48 V	9-60 V	1.2 A	0.6A	14 W	5000	5 
1400 lm	12-48 V	9-60 V	1.7 A	0.9 A	21 W	5000	5 