



1010 BLUEBEAM

1010 BlueBeam and RedBeam are powerful spotlights, with a wider beam pattern than the BluePoint and RedPoint. Along with the bright blue colour, the BlueBeam serves a practical purpose, ensuring operators of crop sprayers to have full visibility of the nozzle spray being spread across the fields with its powerful illumination.

SUGGESTED APPLICATIONS

The 1010 BlueBeam is mainly used on agricultural sprayers. However, it can be used across numerous other applications worldwide.



AGRICULTURE



Note: the lens of the BlueBeam is clear, the blue light is emitted from LEDs

TECHNICAL DATA

- Housing Material:** Cast Aluminium
- Mounting Options:** Hanging
Standing
- Lens Material:** Polycarbonate
- Temperature range:** -40 to +75 °C
- Connector:** Deutsch (DT04-2P) built in
- Weight:** 920 g
- Light Patterns:** Spot



- Dampened
- Overheating Protection
- Over-voltage Protection
- Polarity Protection

TEST STANDARDS

- Salt Spray ASTM B117 500 h
- Vibration 5-2000 Hz 3 Axis, 10 Grms
- Shock Tested 50 G 11 ms
- IP69K
- EN55025 / CISPR 25 Class 4
ISO 11452-2 / ISO 11452-4
ISO 16750-2 / ISO 10605
ISO 7637-2
- UL Rated Optional

Consult www.tyrilights.com for additional lens & mounting options

TYRI's testing standards can be found at: www.tyrilights.com

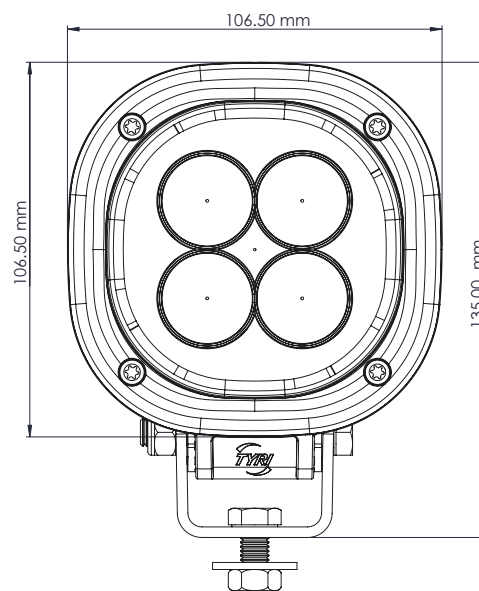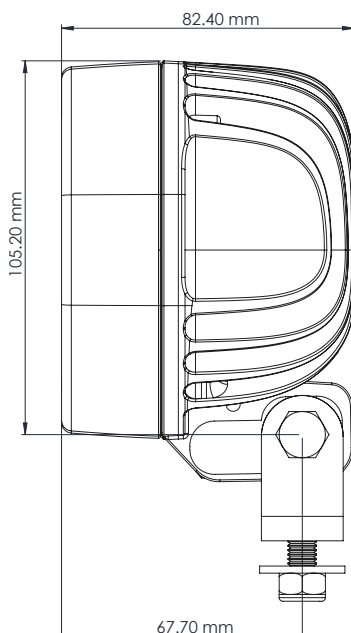



1010 BLUEBEAM

LIGHT INTENSITY	VOLTAGE		AMP DRAW		POWER	DOMINANT WAVELENGTH TYPICAL	LENS PATTERN	PART NO.	EMC
	Machine	Op Range	12 V	24 V					
10,000 cd	12-48 V	9-60 V	1.2 A	0.6 A	15 W	475 nm	Blue Spot	CLD-405-1	4
10,000 cd	12-48 V	9-60 V	1.2 A	0.6 A	15 W	475 nm	Blue Spot	CLD-648-1 *	4
10,000 cd	12-48 V	9-60 V	1.2 A	0.6 A	15 W	630 nm	Red Spot	CLD-584-1	4

* Stainless hardware

IEC/SS-EN 62471 | RISK GROUP 2


CAUTION: Possibly hazardous optical radiation emitted from this product.
Do not stare at operating lamp. May be harmful to the eye.

It is important to remember, LED work lights are no more hazardous than other lighting technologies with the same correlated colour temperature (CCT).

TYRI complies with the IEC/SS-EN 62471 standard with the addition of the warning label on the product.

TYPICAL LIGHT PATTERNS

Example for 1010 BlueBeam | For further light patterns visit www.tyrilights.com

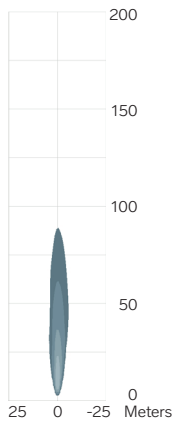

1010 BlueBeam

Spot
1.0 m / 0°
Symmetric

