



0909 COMPACT+ REDPOINT

The 0909 Compact+ RedPoint has a slim housing and a curved lens. It is UL certified and carries an IP rating of 69K.

This warning light is also available as a standard work light, allowing you to match your machine lighting for a unified design.



Note: the lens of the RedPoint is clear, the blue light is emitted from LEDs

TECHNICAL DATA

Housing Material: Cast Aluminium

Mounting Options: Hanging
Standing

Lens Material: Polycarbonate

Temperature range: -40 to +85 °C

Connector: Deutsch (DT04-2P) built in.
Mating part: DT06-2S

Weight: 300 g / 0.66 lb

Light Patterns: Spot



FEATURES

- Overheating Protection
- Over-voltage Protection
- Polarity Protection
- UL Optional

TEST STANDARDS

- Salt Spray ASTM B117 500 h
- Vibration 5-2000 Hz 3 Axis, 10 Grms
- Shock Tested 50 G 11 ms
- IP69K
- EN55025 / CISPR 25
Class 3 - Metal bracket
Class 5 - PA6 bracket
ISO7637-2, ISO10605, ISO11452-2,
ISO11452-4, ISO16750-2

For further information visit www.tyriLights.com or contact your local sales team.

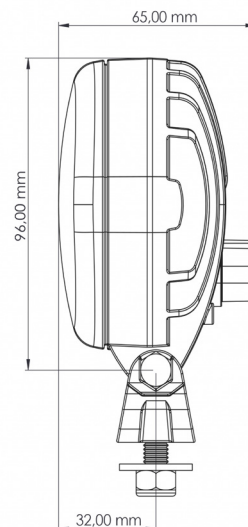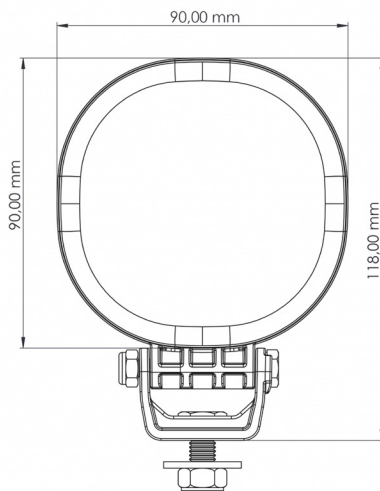



0909 COMPACT+ REDPOINT

LIGHT INTENSITY	VOLTAGE		AMP DRAW		POWER	DOMINANT WAVELENGTH	LENS PATTERN	PART NO.	EMC	ECE
	Candela	Machine	Operating	12 V	24 V	Watts	nm		EN55025 / CISPR25	ECE Rating
20.000 cd	12-48 V	9-60 V	1.4 A	0.7 A	17 W	630 nm	Spot	LLU-140-1	3 & 5	-

LED work lights are exposed to dirt, fertilizers, road salt, acids and more. For best performance and long lifetime, the lens and the cooling fins must be cleaned on a regular basis.